



top: for walls, bottom: for pavers, slabs and kerb stones

STRINGTIGHT SB

The innovative new STRINGTIGHT SB for the horticulture, landscaping, building and construction industry.

Straight and square edges are required when installing paving stones, kerbs, slabs and bricks. Conventional plumb lines often catch against the stone thus not giving an accurate straight line reading. The STRINGTIGHT SB provides a clearance of approx. 5 mm (0.19 inch) between stone and string line – giving great results every time!

- The practical tool for paver laying and masonry work.
- Made of robust steel, powder coated.
- Adjustable distance of the string line laterally and vertically.
- With string line take-up and functional slot to place a level on.


Scope of delivery:

SB: The kit contains 2 metal brackets, 1 roll of Nylon line: thickness 1,4 mm (0.05 inch) with a length of 100 m (3937 inch). Comes in a decorative promotional display rack each with 12 kits.

Type	Description	Dimensions L x W mm (in)	Dead Weight kg (lbs)	Order-Number
SB	STRINGTIGHT promotion display	120 x 120 (4.72 x 4.72)	8.3 (18)	51800072

Accessories:

Type	Description	Order-Number
Spare line	1 roll of Nylon line: thickness 1,4 mm (0.05 inch) with a length of 100 m (3937 inch)	25400012

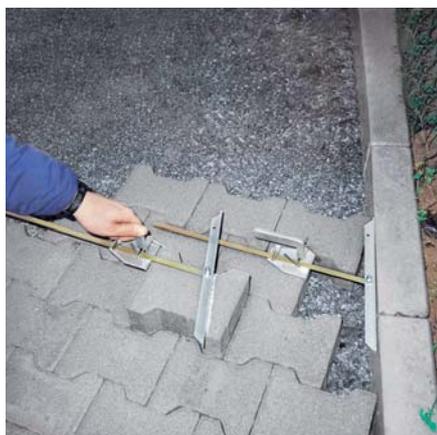

MAL

Measuring and Marking Tool MAL

An essential tool for marking out paving stones and slabs to be cut.

- Easy and quick transfer of angle and distance of the cutting edge.



Type	Dead Weight kg (lbs)	Order-Number
MAL	0.58 (1.28)	51800026