




## Double Fork Lift Grab STAZ-DZ-II

Consisting of two single clamps (see STAZ for technical data). Connected by a spreader bar. Suitable for lifting 2 stacks at the same time if they are stacked longitudinally on the conveyor belt. The same unit can be equipped with a hydraulically operated distance adjuster bar which can remove any gaps between the stacks, thus saving space in the storage area.

► Only one hydraulic circuit is needed to be supplied by means of the fork lift truck, if both clamps are operated together. To operate the clamps individually, see page 7.9 ELMV-DZ. (Supplied without connecting hoses to the fork lift truck).

Polyamide sliding guides come with a 5 year guarantee.

All Forklift Grabs can also be used as cubing grabs in fully automatic cubers for blocks and pavers.

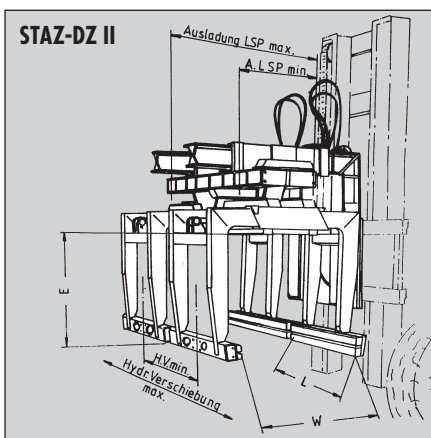

### Recommended Accessories:

(Description see pages 11.7 – 11.12)

Type	
<b>Gripping Elements:</b>	
<b>Rubber Grippers</b>	see page 11.7
<b>Steel Finger Grippers, heavy duty design</b>	see page 11.8
<b>Double steel finger grippers, heavy duty design 2-rows mounted on top of each other</b>	see page 11.8
<b>Connections for both clamps:</b>	
<b>Spreader bar fixed</b>	see page 11.11
<b>Spreader bar with hydraulic distance adjustment</b>	see page 11.11
<b>Connections to the fork lift truck:</b>	
<b>Fork Sleeves for Fork Peaks</b>	see page 11.9
<b>Crane Boom KA-II-SS</b>	see page 11.10
<b>Crane Boom with hydraulic extending suspension with distance adjuster bar KA-II-SS-VA</b>	see page 11.10
<b>Hydraulic connection hoses to the fork lift</b>	see page 11.12
<b>Electrical Connection-Kit between STAZ-DZ II and forklift</b>	see page 11.12

See pages 11.7 – 11.11 for further accessories.

Special accessories available on request.

The drawing above shows a standard unit consisting of the following components:

- 2 x STAZ-S-1000-UNIGRIP
- 2 x rubber grippers, 1,250 mm long
- 1 x spreader bar with hydraulic distance adjustment
- 1 x crane boom with hydraulic extending suspension KA-II-SS-VA
- 2 x electro-magnetic change-over-valve ELMV-DZ
- 1 x electro-magnetic change-over valve ELMV
- 2 pairs of hydraulic connection hoses to the fork lift