




STAZ-UNI

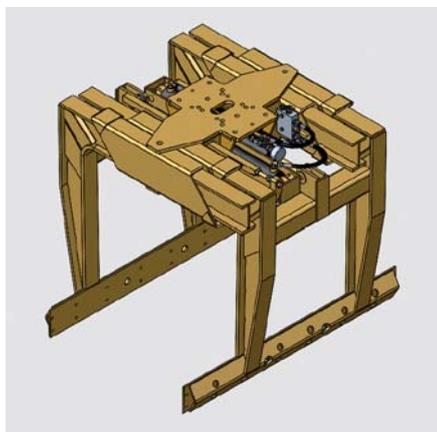

STAZ-UNI

## Fork Lift Grab STAZ-UNI

**Specially designed for heavy duty work with fork lift trucks.**

For gripping heavier loads, or packs produced on multi-layer production machines. In particular used in conjunction with steel finger grippers. Can also be used for gripping packs of pavers which are not vertically steel strapped.

- Light-weight, yet with a high carrying capacity due to the use of high-tensile steel for load-bearing parts.
- Can fit all the usual packs of building materials due to a large opening range and to the exchangeable grippers which come in various lengths and designs.
- Fully hydraulic parallel opening range. Low-maintenance steel-polyamide sliding guides.
- Manually adjustable pressure relief valve.
- Oil Pressure Gauge.
- Polyamide sliding guides come with a 5 year guarantee.

Type	Inside Height mm (in)	Dead Weight kg (lbs)	Hydraulic Connection Pressure bar (psi)	Opening Width Main Gripper mm (in)	Working Load Limit/WLL kg (lbs)	Gripper Base Length mm (in)	Order-Number
<b>STAZ-UNI-0700</b>	700 (27½)	500 (1,100)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	4,000 (8,800)	1,250 (49¼)	<b>57000700-1250</b>
<b>STAZ-UNI-0850</b>	850 (33½)	505 (1,110)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	4,000 (8,800)	1,250 (49¼)	<b>57000850-1250</b>
<b>STAZ-UNI-1000</b>	1,000 (39¼)	525 (1,160)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	3,750 (8,300)	1,250 (49¼)	<b>57001000-1250</b>
<b>STAZ-UNI-1200</b>	1,200 (47¼)	560 (1,240)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	3,250 (7,200)	1,250 (49¼)	<b>57001200-1250</b>
<b>STAZ-UNI-1300</b>	1,300 (51¼)	575 (1,270)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	3,000 (6,600)	1,250 (49¼)	<b>57001300-1250</b>
<b>STAZ-UNI-1350</b>	1,350 (53¼)	585 (1,290)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	3,000 (6,600)	1,250 (49¼)	<b>57001350-1250</b>
<b>STAZ-UNI-1400</b>	1,400 (55)	595 (1,310)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	2,750 (6,100)	1,250 (49¼)	<b>57001400-1250</b>
<b>STAZ-UNI-1550</b>	1,550 (61)	610 (1,350)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	2,500 (5,500)	1,250 (49¼)	<b>57001550-1250</b>