



SA

STRING ALONG SA

The brilliantly simple and flexible line holder for all setup work performed with a plumb line.


By undoing the spring bolt and turning the swivel arm, sleeve sections can also be gripped and laid. (external size see table, larger value)

- Generally the SA can be used for all kind of layouts where string lines are used, especially beneficial if the string line has to be taken away temporarily and repositioned afterwards at the same position.
- Gripping teeth hold the string line safely under tension at any time.
- Errors are avoided.
- No more string line knots, or confusing marks on the pins.

Scope of delivery

SA: Pieces 6 in bag

Type	Description	Diameter inside mm (in)	Order-Number
SA	suitable for pin diameters max. 25 mm	25 (1)	51800062

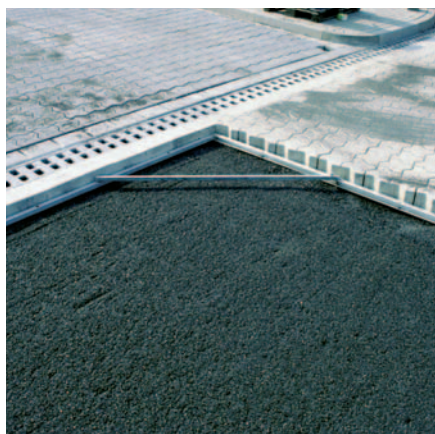

AW-200

Aluminium Angle AW-200

For precise alignment of interlocking paving stones.

Adjustable to 45°, 60° and 90°.

Foldable.

Type	Dimensions L x W mm (in)	Dead Weight kg (lbs)	Order-Number
AW-200	2,000 x 2,000 (78¾ x 78¾)	6 (15)	51800018