



ESP-SW-P-250-A


Pneumatic swivelling base frame for use with exchangeable suction plates ESP-SW-P-250

Developed specifically for handling plate-shaped elements and kerbstones with pneumatic swivelling from vertical to horizontal position and vice versa.

Without suction plate.

- Swivel range of 90° with pneumatic cylinder.
- Can be used on HE-200 and smaller lifting units.
- To improve ergonomics, possibly use handle extension 42300124.

Type	Description	Working Load Limit/WLL -420 mbar kg (lbs)	Order-Number
ESP-SW-P-250-A	Base frame without suction plate	250 (550)	42101227

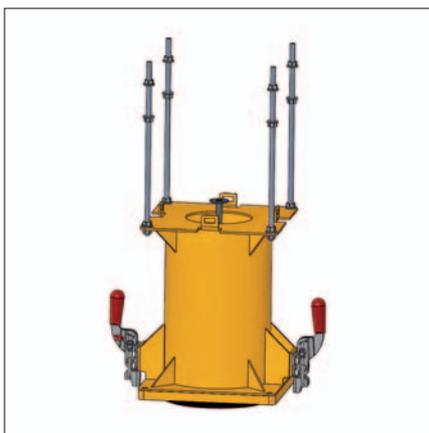

SWA-200 (long version)

Quick Change Adapter SWA

Allows exchange of different suction plates within seconds.

Essentially necessary for lifting loads of 200 kg and more.

Short design as against SZV, specially suitable for in-plant paketize works in use with ESP-SW-F-F-200-75/30-A

Type	Working Load Limit/WLL -420 mbar kg (lbs)	Order-Number
SWA-200 (long version)	250 (550)	42100097
SWA-200 (short version)	250 (550)	42100104