



## Hydraulic Rotator


Rotator with hydraulic rotation plus 2 connection hoses to the clamp.  
Mounted between the gripper and the boom, the rotator enables the exact positioning of the grab when picking up and setting down the stone packs.

- Can be mounted directly on the body tongs by means of a flange connection.
- Hydraulic rotary feed-through allows operation of hydraulic consumers with one control circuit.

Rotator

Type	Dead Weight kg (lbs)	Hydraulic Connection Pressure bar (psi)	Hydraulic Connection Volumetric Flow l/min (gpm)	Working Load Limit/WLL kg (lbs)	Angle Pivoting-/Rotation Angle ° Degree	Order-Number
<b>Continuous hydraulic Rotator</b>	34 (75)	200 / 250 (2,901 / 3,626)	22 (6)	4,500 (9,900)	360	<b>46200253</b>

Rotator also available with pivot.

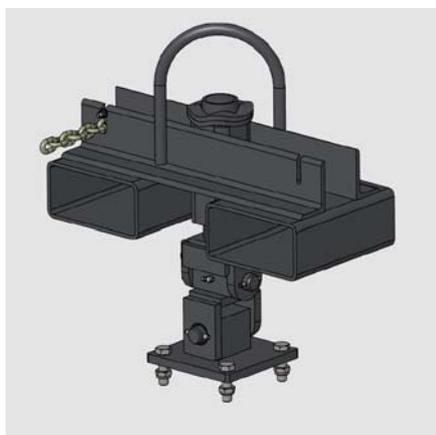

## Fork Sleeves with lifting eye and manual device engaging ET-D

In a hodge after 90°. Enables the AKZ to be lifted by the forks of a wheel loader or forklift.

ET-D

Type	Description	Working Load Limit/WLL kg (lbs)	Order-Number
<b>ET-D</b>	Consisting of ET-D, incl. universal joint, mounting plate.	2,500 (5,500)	<b>43100238</b>