




STAZ

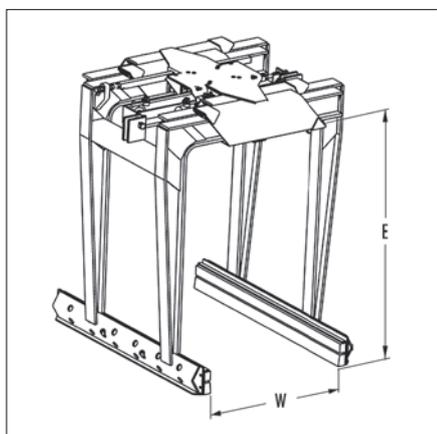

STAZ


Fork Lift Grab STAZ-UNI

Specially designed for heavy duty work with fork lift trucks.


For gripping heavier loads, or packs produced on multi-layer production machines. In particular used in conjunction with steel finger grippers. Can also be used for gripping packs of pavers which are not vertically steel strapped.

- Light-weight, yet with a high carrying capacity due to the use of high-tensile steel for load-bearing parts.
- Can fit all the usual packs of building materials due to a large opening range and to
- the exchangeable grippers which come in
- various lengths and designs.
- Fully hydraulic parallel opening range. Low-maintenance steel-polyamide sliding guides.
- Manually adjustable pressure relief valve.
- Oil Pressure Gauge.
- Polyamide sliding guides come with a 5 year guarantee.

Type	Inside Height mm (in)	Dead Weight kg (lbs)	Hydraulic Connection Pressure bar (psi)	Opening Width Main Gripper mm (in)	Working Load Limit/WLL kg (lbs)	Gripper Base Length mm (in)	Order-Number
STAZ-UNI-0700	700 (27½)	500 (1,100)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	4,000 (8,800)	1,250 (49¼)	57000700-1250
STAZ-UNI-0850	850 (33½)	505 (1,110)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	4,000 (8,800)	1,250 (49¼)	57000850-1250
STAZ-UNI-1000	1,000 (39¼)	525 (1,160)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	3,750 (8,300)	1,250 (49¼)	57001000-1250
STAZ-UNI-1200	1,200 (47¼)	560 (1,240)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	3,250 (7,200)	1,250 (49¼)	57001200-1250
STAZ-UNI-1300	1,300 (51¼)	575 (1,270)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	3,000 (6,600)	1,250 (49¼)	57001300-1250
STAZ-UNI-1350	1,350 (53¼)	585 (1,290)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	3,000 (6,600)	1,250 (49¼)	57001350-1250
STAZ-UNI-1400	1,400 (55)	595 (1,310)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	2,750 (6,100)	1,250 (49¼)	57001400-1250
STAZ-UNI-1550	1,550 (61)	610 (1,350)	180 – 210 (2,611 – 3,046)	370 – 1,370 (14½ – 54)	2,500 (5,500)	1,250 (49¼)	57001550-1250

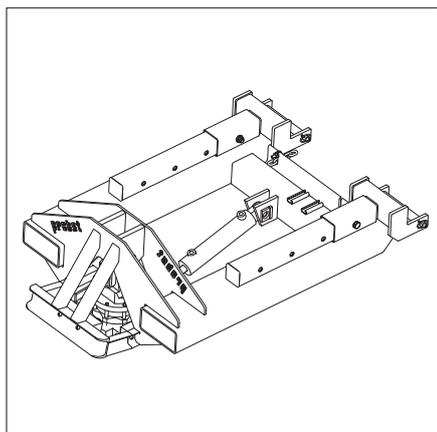

ET-IS-UNI + ETA

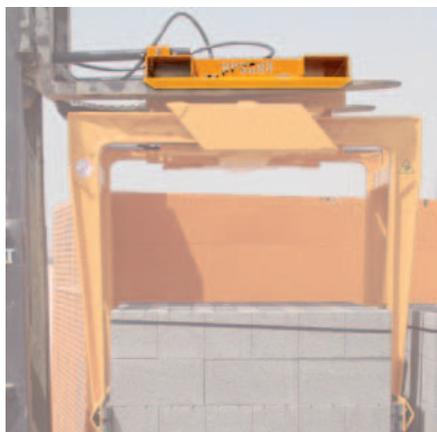

ET-E-4

Fork Sleeves for Forks

For fixing onto the fork tines, with locking device on the forks.

Attention: loss of lifting height (Clamp inside height + approx. 495 mm, according to the model). Various types of fork sleeves are available, depending on the jobs in hand or the attachment device:

Fork Sleeves ET-IS-UNI with cardanic suspension of the clamp:

Designed for the installation of a hydraulic rotator as well as for the installation of a hydraulic swing damper (Only suitable for STAZ and STAZ-DZ-1). With security chain to avoid slipping.

Fork Sleeves Fixation ETA for ET-IS-UNI:

To avoid that the ET-IS uni slips off the forks. Different reach achievable by **pin-adjustment**.

Fork Sleeves ET-III-UNI for single clamps:

Screwed fix to the clamp to be picked up by the forks of the fork lift truck.

Can also be installed in a 90° turn position, due to the symmetrical flange plate.

Fork Sleeves ET-E-4 for single clamps:

Screwed fix to the clamp to be picked up by the forks of the fork lift truck.

As the fork sleeves can be picked up from the front and from the side it is possible to place the STAZ grippers either lengthwise or across to the fork lift.

■ Advantage: short change-over time when adding other attachments to the fork lift.

Type	Description	Load Extension mm (in)	Dead Weight kg (lbs)	Working Load Limit/WLL kg (lbs)	Order-Number
ET-IS-UNI-506	variable	1,000 (39¼)	140 (310)	4,000 (8,800)	47110074
ET-IS-UNI USA	variable	1,000 (39¼)	150 (330)	4,000 (8,800)	47110023
ET-III-UNI for STAZ-UNI-4	variable	700 (27½)	130 (285)	4,000 (8,800)	47110016
ET-III-UNI for STAZ-UNI	variable	700 (27½)	130 (285)	4,000 (8,800)	47110019
ET-E-4		440 – 940 (17¼ – 37)	98 (215)	4,000 (8,800)	47110052

Accessories

Type	Description	Load Extension mm (in)	Dead Weight kg (lbs)	Order-Number
ETA	Fork Sleeves Fixation (pair)	1,000 – 1,450 (39¼ – 57)	20 (45)	47110036